

# LED Flood Light

FLL24-120 and FLL24W-120  
120VAC 50/60Hz operation

Project:	
Catalog#:	
Approved by:	
Date:	

## Features

- Energy Saving
- Comparable to 250W halogen while using less energy
- 50,000 hour LED lifespan for maintenance-free operation
- Heat dissipating fins optimizes thermal management

## Housing

- Low-copper, aluminum die-cast housing and lens frame
- Heat dissipating fins for optimized thermal management.
- Durable polyester powder coat finish
- Bronze or white housing

## Lens/Refractor

- Tempered glass lens, thermal shock and impact resistant.

## LEDs/LED Driver

- 24W
- Color temp: Neutral White (4100K)
- CRI: 80
- 2,300 Lumen Output
- 50,000 Hour Life
- Input voltage: 120VAC 50/60 Hz
- Knurled notches securely retain rotated position even in demanding environments.

## Mounting

- 1/2" NPS aluminum die-cast swivel arm fits to standard junction box (not included).
- Side screw on arm knuckles allows for optics aiming.

## Certifications

- UL/CUL Listed, suitable for Wet Locations

## Warranty


- 2-Year Warranty

## Applications


Ideal for building facades, security, accenting architecture, signs and displays.



## Photometrics

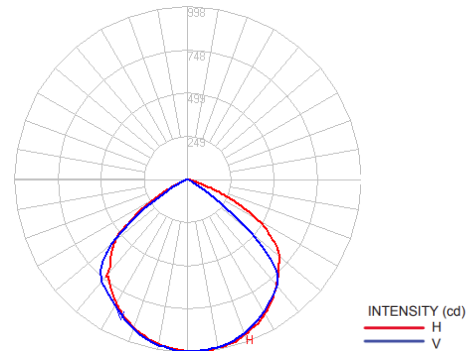

## Dimensions

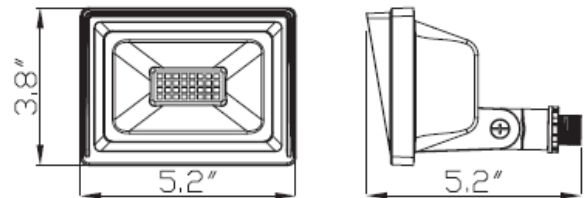

Ordering Information						
UPC Code	Model #	Input Wattage	Lumens	Driver	Voltage	Housing Color
09500	FLL24-120	24 Watt	2,300 lm	LED	120VAC 50/60 Hz	Bronze
09501	FLL24W-120					White

## Sample Ordering Information

**FLL24-120**  
24W, 2,300 Lumens  
4100K  
120VAC  
Bronze Housing

