

GL6500N Series - Nitrile Coating ESD Level 6 Cut Resistant Gloves

Performance

- 18 gauge exclusive lining technology contributing it the thinnest cut F glove
- Over 38% lighter than a standard cut F glove
- ANSI Cut level A6 Certified
- EN16350 anti-static approved
- 10-finger touch screen compatible
- Perfect dexterity, flexibility, super comfort & fitting
- Super grip in both dry and wet conditions
- Breathability to keep your hands cool while working

Application

- Automotive industry
- Glass industry
- Paper industry
- Construction
- Electronics industry


12 pairs per bag

Wash at 40 C max and machine washing available

The gloves are cut resistant, not cut proof. Do not use them next to moving machinery.

Certification

 EN388 ABRASION 0 1 2 3 4 TEARING 0 1 2 3 4 4X43F ISO 13997 A B C D E F	 ANSI A6 CUT 	 EN16350 TOUCH SCREEN COMPATIBLE 	 OEKO-TEX® STANDARD 100 MADE IN GERMANY www.oeko-tex.com
 EN407 LIMITED FLAME SPREAD 0 1 2 3 4 CONVECTIVE HEAT 0 1 2 3 4 SMALL SPLASHES OF MOLTEN METAL 0 1 2 3 4	 ESD ESD LEVEL 6	 EN388 ABRASION 0 1 2 3 4	 EN407 CONTACT HEAT 0 1 2 3 4 RADIANT HEAT 0 1 2 3 4 LARGE SPLASHES OF MOLTEN METAL 0 1 2 3 4

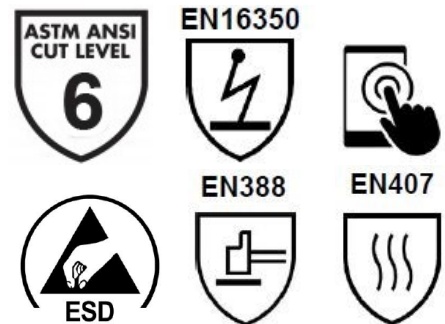

Specifications

Coating Material:	Nitrile
Coating Color:	Black
Liner:	UHMWPE/Metal Wire
Liner Color:	Grey
Finishing:	Sandy
Cuff Style:	Knit Wrist
Gauge:	18
Contains:	UHMWPE, Steel wire, Nylon, Spandex, Polyester, Nitrile

Resistance: 1x10⁶-1x10⁸

[Test Report](#)

Part Numbers:

- GL6501N—Extra small, Nitrile Coated, Blue Cuff
- GL6502N—Small, Nitrile Coated, Yellow Cuff
- GL6503N—Medium, Nitrile Coated, Red Cuff
- GL6504N—Large, Nitrile Coated, Green Cuff
- GL6505N—XL, Nitrile Coated, White Cuff
- GL6506N—2XL, Nitrile Coated, Brown Cuff

Sizes	XS	S	M	L	XL	2XL
Palm Width (cm)	8.50	9.00	9.50	10.00	10.50	11.00
Total Length (cm)	22.00	23.00	24.00	25.00	26.00	27.00

This document is prepared for our customers as a service, and is to the best of our knowledge true and accurate. However, it is understood and agreed by the users of this document that we will accept no liability for the conclusions reached. Users of this document may therefore wish to perform additional testing before determining that products mentioned are suitable.