

Cash Acme™

Tankless Water Heater Installation Kit

The Cash Acme™ Tankless Water Heater Installation Kit makes connecting to the tankless water heater easy and convenient. The valves connect directly to the cold water inlet and the hot water outlet of the tankless water heater.

Approved Applications

Connecting water supply to tankless water heaters.

Specification Data

Performance

Maximum Inlet Pressure	200 psi
Maximum Temperature	200°F (93°C)
Service	Potable Water
Relief Pressure	150 psi

Valve Materials

Body	Lead-Free Brass
Ball	T.E.A Coated Brass
Seat	PTFE
Stem	Lead-Free Brass
O-Ring	FKM
Packing	Brass
Gland	PTFE
Handle	Steel with PVC Grip
Union Washer	EPDM
Tail Piece	Lead-Free Brass
Union Nut	Brass
Tether	PVC
Cap	Lead-Free Brass
Flat Washer	EPDM


Certifications & Listings

Cold/Hot Valves (T103ASG): NSF/ANSI/CAN 372, NSF/ANSI/CAN 61


Relief Valve (FWL-2): ANSI Z21.22/CSA4.4 and are capacity certified to ASME Boiler Code Section IV.




Cold Valve

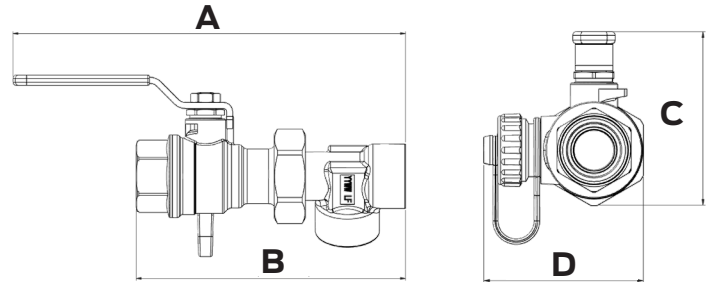

Hot Valve

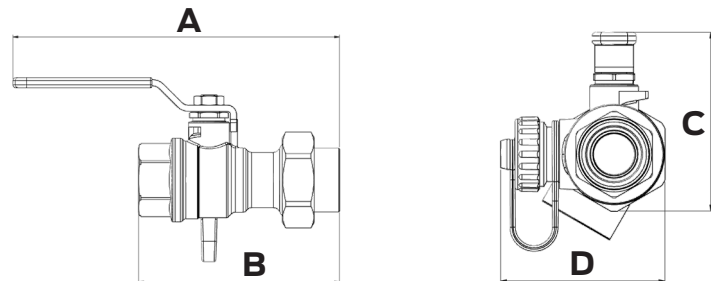

Relief Valve

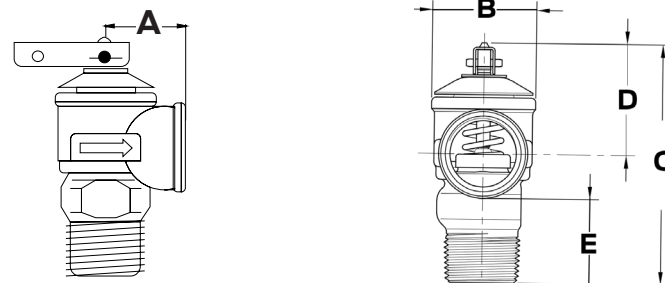

Dimensions (inches)

Component	Size	Connection Style	Part #	A	B	C	D	E
Cold Valve	3/4"	Threaded NPT	25940	7-23/32	5-9/32	2-29/32	2-11/16	-
Hot Valve	3/4"	Threaded NPT	25941	6-5/16	3-7/8	2-29/32	2-11/16	-
Relief Valve	3/4"	Threaded NPT	23342	1-5/32	1-15/32	3-3/8	1-9/16	1-3/16

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	