


## Lead Free Brass Ball Valve

2 Piece, Full Port, Press x Hose Connection with Hose Cap, 250 WOG

**JP-100HCG**

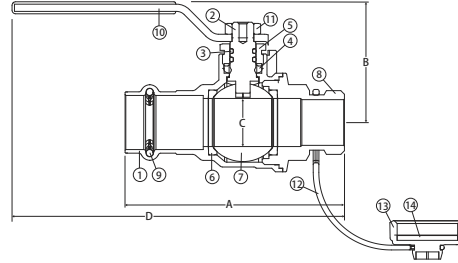

### FEATURES

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rngs and PTFE G300
- Hose Connection with Strapped Cap
- Blow-out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- Wetted Surfaces Contain Less than .25% Lead Content

### CERTIFICATIONS/APPROVALS

- NSF/ANSI/CAN 61-G
- ANSI B1.20.7
- Conforms to IAPMO PS 117
- Meets ISO 6509

### PRESSURE/TEMPERATURE RATING

- 250 WOG
- MAX. 250° F

### MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C27453
2	Stem	Lead Free Brass - C28500
3	O-Ring (2)	FKM
4	Packing	PTFE G300
5	Packing Gland	Brass - C38500
6	Seat (2)	PTFE G300
7	Ball	T.E.A. Coated Lead Free Brass - C28500
8	End Connection	Lead Free Brass - C27453
9	O-Ring	EPDM
10	Handle	Steel
11	Nut	Steel
12	Tether	PVC
13	Cap	Brass - C37700
14	Gasket	NBR

### DIMENSIONS

Part No	Size	A	B	C	D
100-773G	1/2" Press x 3/4" Hose	3.23	1.57	0.59	4.53
100-774G	3/4" Press x 3/4" Hose	2.59	1.97	0.79	5.43



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).