

Lead Free Bronze Ball Valve

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, Insulated Handle, 600 CWP, 150 WSP

T-200CSSG-IH



FEATURES

- Dezincification Resistant Lead Free Bronze
- Blow-Out Proof Stem
- Heavy Commercial Pattern
- 100% Leak Tested
- IAPMO Certified: NSF 61 & NSF 372 & NSF 14
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content

CERTIFICATIONS/APPROVALS

IAPMO Certified

- NSF/ANSI/CAN 61-8 2018
- NSF/ANSI 372-2016
- IAPMO/ANSI Z1157-2014
- ASME A112.4.14/CSA B125.14:22
- NSF/ANSI 14-2016



Threads According to ANSI B1.20.1
Meets MSS SP-110

PRESSURE/TEMPERATURE RATING

100 PSIG at 300°F (up to 2")
600 PSIG at Ambient (up to 2")

VALVE SEAT RATING

600 CWP - 150 WSP

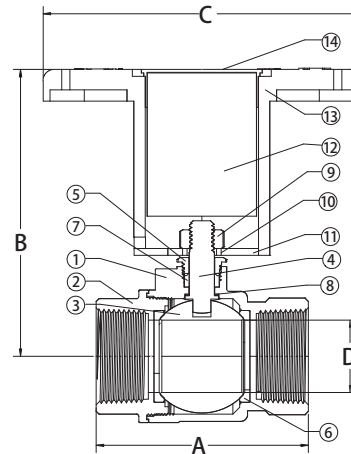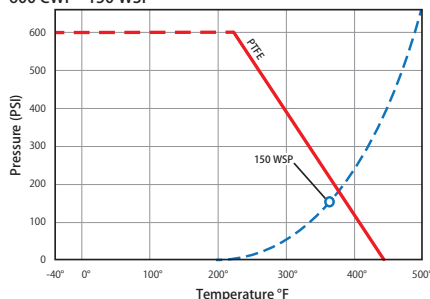

MATERIALS

No.	Part	Material
1	Body	Lead Free Bronze - C89836
2	Tailpiece	Lead Free Bronze - C89836
3	Ball	Stainless Steel 316
4	Stem	Stainless Steel 316
5	Packing Nut	Brass - C36000
6	Seat (2)	PTFE
7	Packing Gland	PTFE
8	Thrust Washer	PTFE
9	Handle Nut	Steel - Geomet® Plated
10	Slide	Chrome Plated Steel
11	Base Plate	Chrome Plated Steel
12	Foam Insert	Polystyrene
13	Handle	Nylon
14	Cap	LDPE
15*	Sleeve	CAB Tubing

*Not Pictured

DIMENSIONS

Part No	Size	A	B	C	D
200-403SSG-IH	1/2"	2.43	4.36	4.25	0.50
200-404SSG-IH	3/4"	2.79	4.65	4.25	0.75
200-405SSG-IH	1"	3.28	4.82	4.25	0.98
200-406SSG-IH	1-1/4"	3.68	4.98	4.25	1.24
200-407SSG-IH	1-1/2"	4.08	5.48	5.51	1.5
200-408SSG-IH	2"	4.59	5.79	5.51	1.97



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.