


Lead Free Brass Ball Valve

2 Piece, Full Port, Threaded x Hose Connection with Hose Cap, 600 WOG

T-100HCG

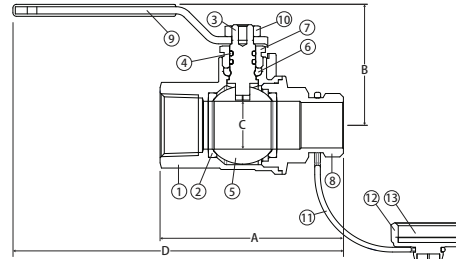

FEATURES


- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and PTFE G300
- Hose Connection with Strapped Cap
- Blow-out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- Wetted Surfaces Contain Less than .25% Lead Content

CERTIFICATIONS/APPROVALS

- NSF/ANSI/CAN 61-G
- ANSI B1.20.1
- ANSI B1.20.7
- Meets ISO 6509

VALVE SEAT RATING

1/2" - 3/4" 600 WOG

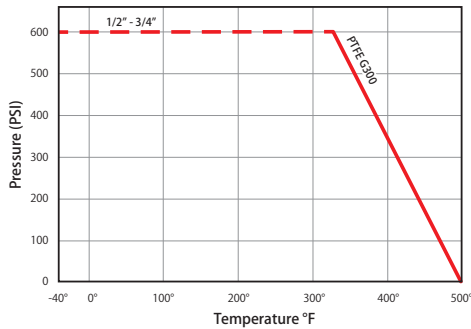

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C27453
2	Seat (2)	PTFE G300
3	Stem	Lead Free Brass - C28500
4	O-Ring (2)	FKM
5	Ball	T.E.A. Coated Lead Free Brass - C28500
6	Packing	PTFE G300
7	Packing Gland	Brass - C38500
8	End Connection	Lead Free Brass - C27453
9	Handle	Steel
10	Nut	Steel
11	Tether	PVC
12	Cap	Brass - C37700
13	Gasket	NBR

DIMENSIONS

Part No	Size	A	B	C	D
100-753G	1/2" NPT x 3/4" Hose	2.75	1.57	0.59	4.53
100-754G	3/4" NPT x 3/4" Hose	3.01	2.01	0.79	5.43



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.